



New Product – Key Facts

Product:

SPEEDHAMMER MAX DRILL BIT RANGE

- Drill Bit diameters available from 12 mm to 40 mm.
- Drill bit total lengths available from 340 mm to 920 mm.

Application:

- Designed for easy and trouble free drilling of concrete, granite and similar very hard materials.

NEW PATENTED CARBIDE TIP DESIGN


- Head takes 80% of the workload, ensuring higher durability, speed and rebar performance
- 53° drilling head design means more aggressive cutting and faster dust removal for overall faster performance
- Four-cutter tips for less vibration, faster drilling, rounder holes and better anchoring

SHANK
Fits all SDS-max rotary hammers.

BRAZING

The brazing process used to attach the tip to the drill bit is conducted at 1000° Celsius meaning high heat resistance for longer bit life. A bronze brazing paste is used to ensure a perfect bond.

SPEED
Patented carbide tip design and innovative single flute combine to provide 30% faster drilling

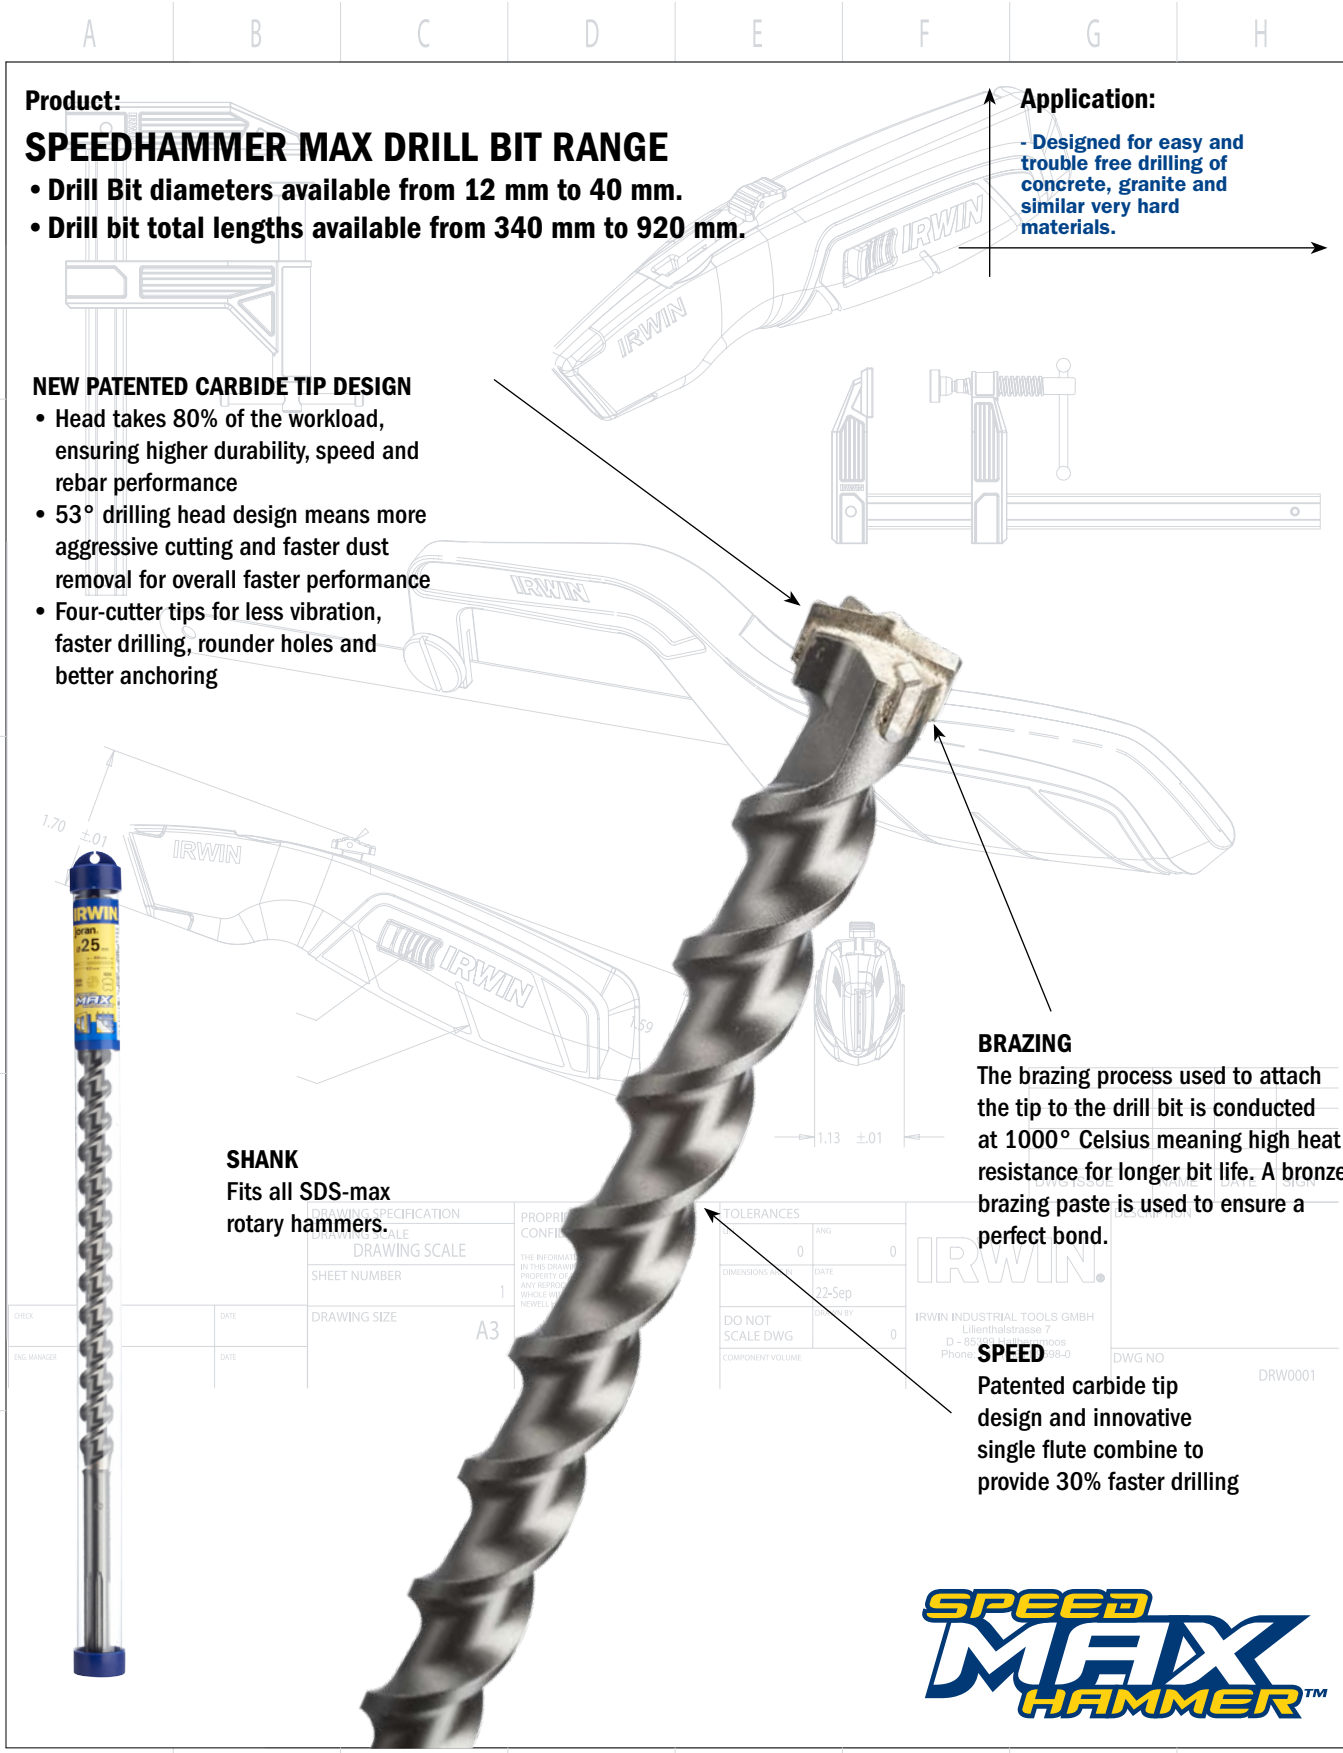

SPECIFICATION		PROPERTY		TOLERANCES		IRWIN	
SCALE		CONFIRMATION		ANG		IRWIN INDUSTRIAL TOOLS GMBH	
DRAWING SCALE		PROPERTY OF IRWIN INDUSTRIAL TOOLS GMBH		0		Lilienthalstrasse 7	
SHEET NUMBER		WHOLE OR PART		DATE		D - 85386 Eching	
1		REVISION		22-Sep		Phone: +49 89 30 99 99-0	
DRAWING SIZE		DATE		0		DWG NO	
A3		DATE		0		DRW0001	
CHECK		DATE		0			
ENG. MANAGER		DATE		0			

IRWIN®

New Product – Key Facts

	A	B	C	D	E	F	G	H
▶ IRWIN SPEEDHAMMER Max Drill Bits 2 Cutting Edges								
Part #	Drill Diameter	Working length	Total Length	Master Qty	Shelf Pack	EAN		
10502092	12,0	200	340	25	5	5709131233756		
10502093	12,0	400	540	10	5	5709131233770		
10502094	12,0	550	690	10	1	5709131233794		
10502095	14,0	200	340	25	5	5709131233817		
10502096	14,0	400	540	10	5	5709131233831		
10502097	15,0	200	340	25	5	5709131233855		
10502098	15,0	400	540	10	5	5709131233879		
▶ IRWIN SPEEDHAMMER Max Drill Bits 4 Cutting Edges								
Part #	Drill Diameter	Working length	Total Length	Master Qty	Shelf Pack	EAN		
10502099	16,0	200	340	25	5	5709131233893		
10502100	16,0	400	540	10	5	5709131233916		
10502101	18,0	200	340	25	5	5709131233930		
10502102	18,0	400	540	10	5	5709131233954		
10502103	20,0	200	320	25	5	5709131233978		
10502104	20,0	400	520	10	5	5709131233992		
10502105	20,0	800	920	5	1	5709131234012		
10502106	22,0	200	320	25	5	5709131234036		
10502107	22,0	400	520	10	5	5709131234050		
10502108	22,0	800	920	5	1	5709131234074		
10502109	24,0	200	320	10	1	5709131234098		
10502110	24,0	400	520	5	1	5709131234111		
10502111	25,0	200	320	10	1	5709131234135		
10502112	25,0	400	520	5	1	5709131234159		
10502113	25,0	800	920	5	1	5709131234173		
10502115	28,0	250	370	5	1	5709131234197		
10502116	28,0	450	570	5	1	5709131234210		
10502117	28,0	550	670	5	1	5709131234234		
10502118	30,0	250	370	3	1	5709131234241		
10502119	30,0	450	570	3	1	5709131234272		
10502120	32,0	250	370	3	1	5709131234296		
10502121	32,0	450	570	3	1	5709131234319		
10502122	32,0	800	920	3	1	5709131234333		
10502123	35,0	250	370	3	1	5709131234340		
10502124	35,0	450	570	3	1	5709131234364		
10502125	35,0	550	670	3	1	5709131234388		
10502126	38,0	250	370	2	1	5709131234395		
10502127	38,0	450	570	2	1	5709131234401		
10502128	40,0	250	370	2	1	5709131234418		
10502129	40,0	450	570	2	1	5709131234425		
10502130	40,0	800	920	2	1	5709131234467		